

Denso®


Protal 600 CTE & CTE Low VOC

Coal Tar Epoxy & Low VOC Coal Tar Epoxy



Uses & Applications

- Sheet piles
- Steel piles
- Non-potable water pipelines
- Treatment / storage tanks
- Many other aggressive industrial applications

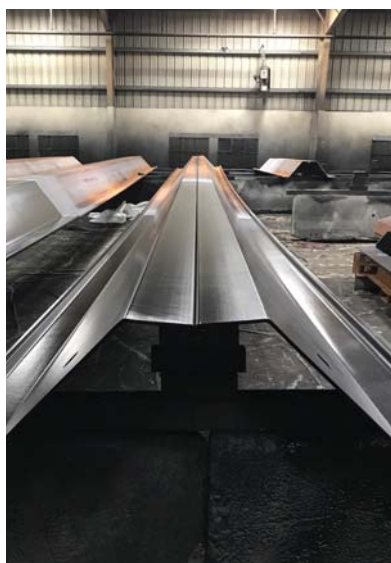

Denso®

Protal 600 CTE & CTE Low VOC



Protal 600 CTE provides long-term corrosion protection to steel sheet piles.



Tie rods coated with Protal 600 CTE Low VOC. Only 0.4 lbs/gal (50 g/l) VOC.

Features

- Easy to spray apply & fast cure time
- High build up to 26 mils WFT (660 microns) in one coat
- Excellent abrasion resistance
- Good impact resistance
- Excellent flexibility, hardness and adhesion (3400+ psi)
- Can be used with cathodic protection systems
- Excellent resistance to water, seawater, wastewater, alkaline water and acidic water
- Exceeds AWWA C-210 for exterior
- Exceeds Corp of Engineers C-200, C200a



Protal 600 CTE is a two-part high build coal tar epoxy that is applied with a single leg airless unit.



No primer is required when applying Protal 600 CTE.

Denso®

DENSO NORTH AMERICA

HOUSTON:
9747 Whithorn Drive,
Houston, Texas,
U.S.A. 77095
Tel: 281-821-3355
Fax: 281-821-0304

TORONTO:
90 Ironside Crescent,
Unit 12, Toronto,
Ontario, Canada M1X1M3
Tel: 416-291-3435
Fax: 416-291-0898

e-mail: info@densona.com

www.densona.com

A Member of Winn & Coales International